

**—TORLYS—**  
**SUPERSOLID**  
H A R D W O O D

[torlys.com](http://torlys.com)

**—TORLYS—**  
**SUPERSOLID**  
H A R D W O O D



**A Modern Classic**



# Introducing —TORLYS— SUPER SOLID H A R D W O O D

## Stunning.

### **You've Never Seen Hardwood Like This.**

Long wide planks. With 100% hardwood core for stability and long-lasting performance, finished beautifully with Best-in-Class Klumpp top-coat.

## Sustainable.

### **Better Floors For a Better World.**

All hardwood - with a smart-cut hardwood core and precision-engineered to reduce environmental impact.

## Superior.

### **E-Lock Hardwood Inside.**

What you don't see makes a difference. TORLYS patented E-Lock Hardwood core is innovative engineering that ensures superior performance for decades.

### **Cup & Gap & Crack Resistant**

E-Lock core and quality dry-sawn top layer resists gapping, cracking and splitting - extra-durable for any climate.

### **Install in All Levels of Your Home.**

SuperSolid Hardwood can be installed above, on or below grade – even over radiant heat.







# SUPERSOLID

H A R D W O O D

Welcome to the very best in hardwood,  
beautifully textured with wire-brushed,  
handscraped or smooth finishes.

Every exquisitely crafted plank is  
protected by the highest performance  
KLUMPP finish.

BEACH GROVE OAK\* EE16003-19

LIGHTNING RIDGE OAK\* EE16005 -19



SuperSolid 7 Hardwood



| Species   | Surface Finish  |            | Wear Layer                           |            |
|-----------|---|------------|--------------------------------------|------------|
| White Oak | <b>Wirebrushed</b>  |            | <b>Handscraped &amp; Wirebrushed</b> |            |
|           | Beach Grove Oak*  | EE16003-19 | Sedgebrook Oak*                      | EE16009-19 |
|           | Lightning Ridge Oak*  | EE16005-19 | Wildwood Oak*                        | EE16150    |
|           | Claybridge Oak*   | EE16006-19 | Ragged Rock Oak*                     | EE16151    |
|           | Harbour View Oak* EE16152   |            |                                      |            |
|           | Old Chester Oak* EE16153  |            |                                      |            |
|           | * These floors have high shade variation. Visit <a href="https://torlys.com">torlys.com</a> for more information. |            |                                      |            |
|           |   |            |                                      |            |

3/4” (thickness) x 7-1/2” (width) x Random length (24” to 75”, Average length 65”)

19mm (thickness) x 190mm (width) x Random length (600mm to 1900mm, Average length 1663mm)

SuperSolid 7 Hardwood



Outstanding Quality.  
Modern Style.





# SUPER SOLID

H A R D W O O D


Beautifully styled hardwood in 6 inch widths create a floor that will stand the test of time in both looks and performance.

MEADOW POINT OAK\* EE-SS6-100

OLD POST OAK\* EE-SS6-101




SuperSolid 6 Hardwood

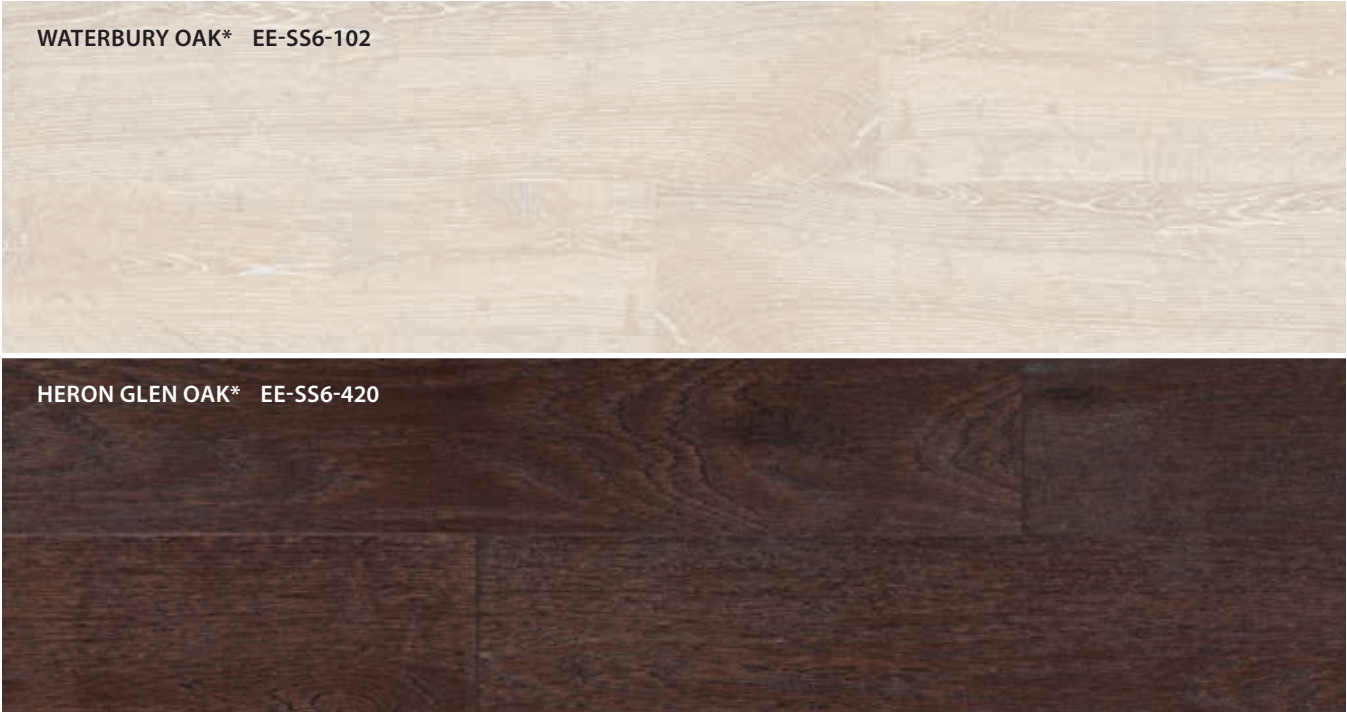

| Species  | Surface Finish               |                               | Wear Layer                                 |
|--|------------------------------|-------------------------------|--|
| White Oak<br>Birch   | Wirebrushed                  | Smooth                        | Guaranteed<br>re-sandable<br>up to 4 times |
|  | Meadow Point Oak* EE-SS6-100 | Island View Birch* EE-SS6-550 |  |
|  | Old Post Oak* EE-SS6-101     | West Forks Birch* EE-SS6-551  |  |
|  | Waterbury Oak* EE-SS6-102    |                               |  |
|  | Heron Glen Oak* EE-SS6-420   |                               |  |
|  | Saybrook Oak* EE-SS6-421     |                               |  |
|  | Trails End Oak* EE-SS6-422   |                               |  |
| * These floors have high shade variation. Visit <a href="http://torlys.com">torlys.com</a> for more information. |                              |                               |  |
| 3/4” (thickness) x 5-7/8” (width) x Random length (24” to 75”)   |                              |                               |  |
| 19mm (thickness) x 150mm (width) x Random length (600mm to 1900mm)   |                              |                               |  |

SuperSolid 6 Hardwood

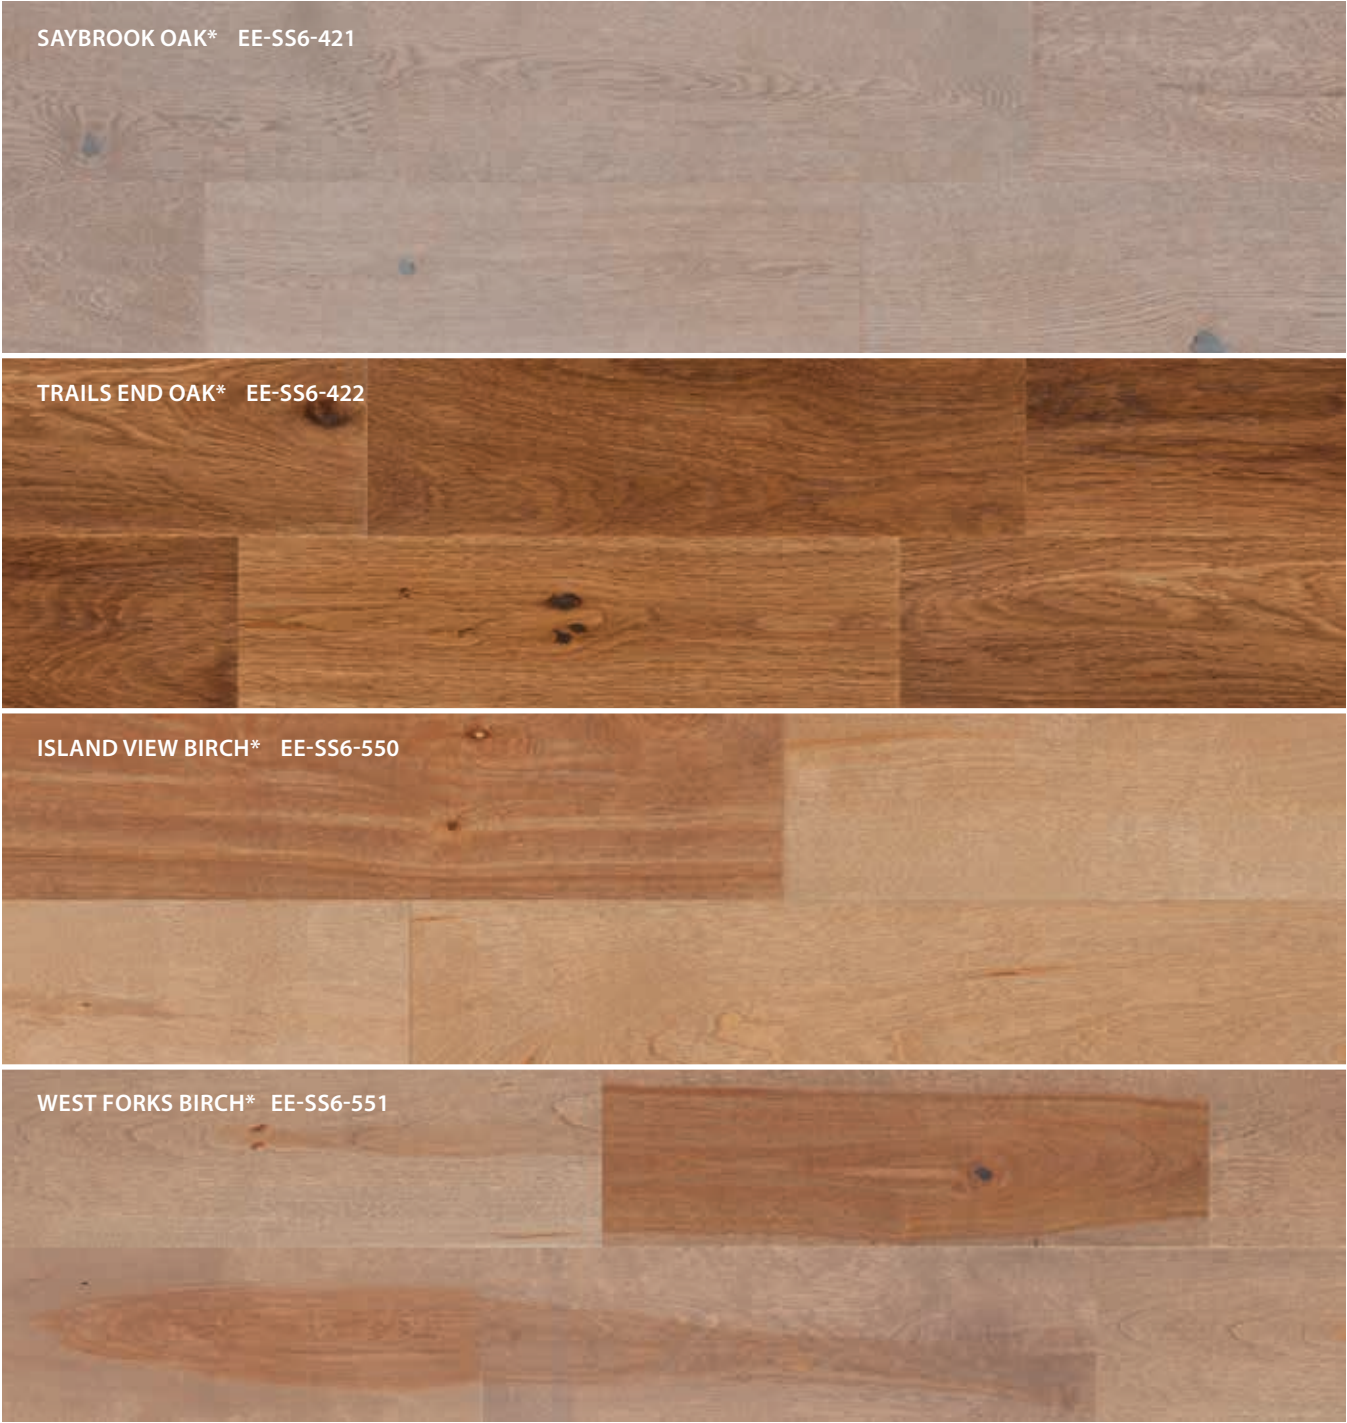

Designer looks.  
Exquisite craftsmanship.





# SUPERSOLID

HARDWOOD


A beautiful collection of stylish,  
environment-friendly floors  
– in designer-selected colours,  
lightly-distressed wirebrushed and  
handscraped oak.

FOOTHILLS OAK\* EE14002

TRAILSIDE OAK\* EE14031



SuperSolid 5 Hardwood

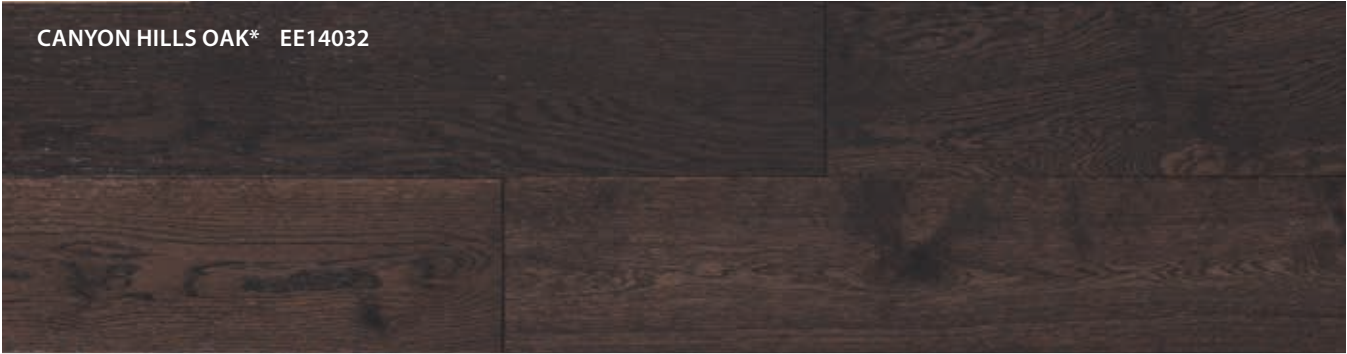

| Species  | Surface Finish   |         | Wear Layer                           |         |
|--|--|---------|--------------------------------------|---------|
| White Oak  | <b>Wirebrushed</b>   |         | <b>Handscraped &amp; Wirebrushed</b> |         |
|  | Trailside Oak*   | EE14031 | Foxcroft Oak*                        | EE14240 |
|  | Canyon Hills Oak*  | EE14032 | Cove Springs Oak*                    | EE14241 |
|  | Brookside Oak*   | EE14034 | Greenport Oak*                       | EE14242 |
|  | <b>Handscraped</b>   |         | Windcrest Oak*                       | EE14243 |
|  | Foothills Oak*   | EE14002 |                                      |         |
|  | * These floors have high shade variation. Visit <a href="http://torlys.com">torlys.com</a> for more information. |         |                                      |         |
| 3/4” (thickness) x 5” (width) x Random length (Random length between 16” to 88”)         |  |         |                                      |         |
| 19mm (thickness) x 127mm (width) x Random length (Random length between 400mm to 2200mm) |  |         |                                      |         |

SuperSolid 5 Hardwood



Impressive. Contemporary.  
Hardwood.



# Best-in-Class Benefits.



## Warranty

SuperSolid Hardwood has a 25-Year Wear Warranty and a Lifetime Structural Warranty for residential use. A 5-Year Wear and Lifetime Structural Warranty applies to light commercial applications. A Radiant Heat Warranty applies to all SuperSolid Hardwood.

### Gap Resistant

E-Lock technology helps prevent ugly gaps from appearing in the cold and dry winter months.

### Cup Resistant

E-Lock Technology provides superior cup resistance – no more unsightly planks.

### Crack Resistant

Dry sawn wear layer resists the cracking or splitting common to solid hardwood.

### Use on Any Level

Guaranteed to perform on any level in your home. Including basements.

### Radiant Heat Safe

Unlike all other solid floors, SuperSolid floors are guaranteed over radiant heat.

### Float, Nail, Glue

Precise milling and engineered construction makes SuperSolid versatile for any installation.

### Re-sandable Wear Layer

The 4mm wear layer can be re-sanded up to 4 times for a lifetime of performance.

### No Added Formaldehyde

No formaldehyde is added anywhere in the manufacturing process.

### Forest Friendly


Creates 4 times more flooring from a single log than traditional 3/4” hardwood floors.

### Recycled Core and Balance Layer

Produced primarily with post-industrial/pre-consumer recycled hardwood.

## Best-in-Class Coating

The very latest nano-particle finish technology from KLUMPP. Since 1919, this industry-leader has provided the ultimate in wear-resistant, superior gloss retaining finishes.

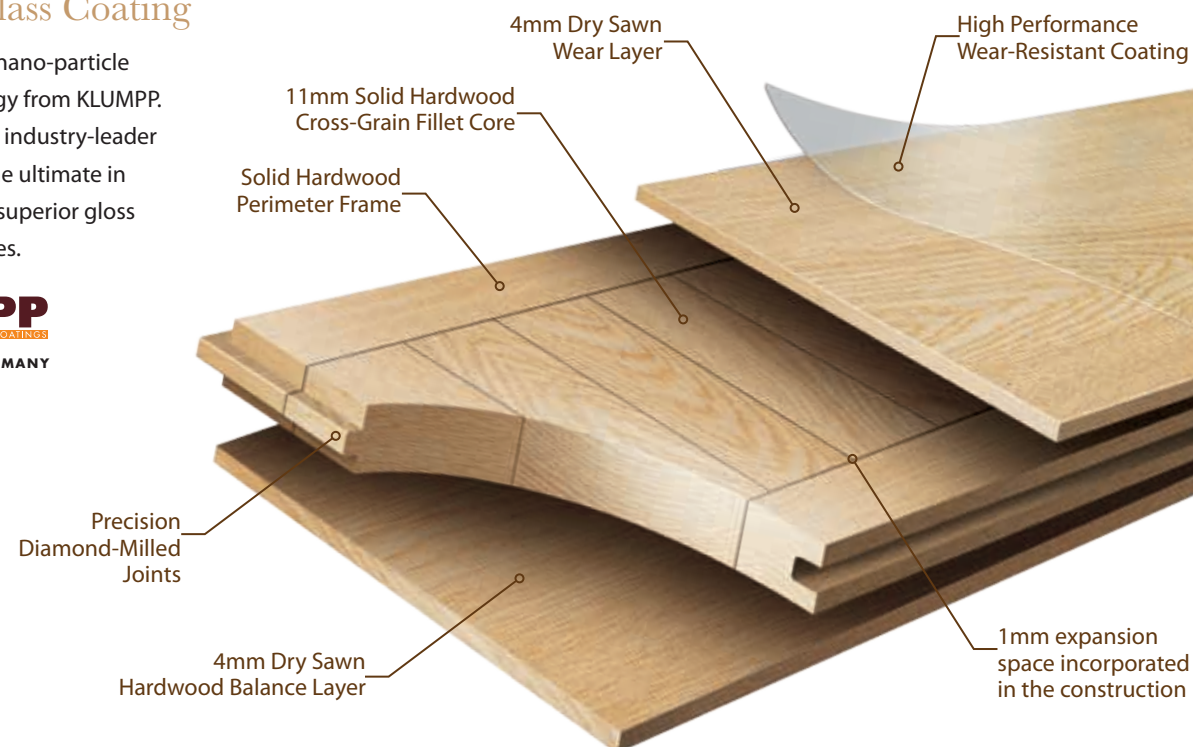

# Cutting Edge Superiority.



## Dry Sawn Top Layer

The dry sawn method is a recognized industry “Best Practice” where solid hardwood is slowly dried to the desired 6-8% moisture content before it’s sawed.

The result:

- Looks identical to 3/4” solid hardwood flooring
- The 4mm ultra-thick wear layer can be sanded up to 4 times
- The natural beauty of the grain is preserved
- Individual boards are unique; no repeat pattern
- Resists cracking, splitting, and checking

## The Competition



### Rotary Peeled

The log is boiled and then peeled in an ultra-thin layer using a rotary cutter (the same method used to make plywood):

- Repetitive patterns similar to plywood.
- Thin wear layer; only one sanding or sometimes none.
- Wood wants to return to its curved shape resulting in splitting and cracking.



### Sliced

Slicing uses a razor to cut logs flat. To slice correctly, the wood must be boiled or steamed which can weaken the structure of the wood and the floor.



# Built for Life in North America

## Best Relative Humidity Performance Guarantee in the Industry!

A major problem with traditional solid hardwood – it can expand and contract when humidity levels change. Typically, the wider and longer the board, the more cupping and gapping problems you’ll see.

SuperSolid Hardwood out-performs solid wood across a much larger range of relative humidity. Superior

engineering and advanced construction ensure cup and gap resistance even with extra long, wide planks.

SuperSolid Hardwood core panels are engineered to withstand warm temperatures. **They can be installed over radiant heat, guaranteed.** Refer to Radiant Heat Installation Instructions for more information.

## The Perfect Balance Between Mother Nature & Technology

Consistent, uniform & symmetrical construction create more stable floors.

Same Thickness

4mm

Both the top wear layer and the bottom balancing layer are made up of 4mm dry sawn hardwood.

Same Species


Oak or Birch

All three layers are constructed from the same species of wood.

Same Moisture

6-8%

All layers are calibrated to the exact same moisture content.

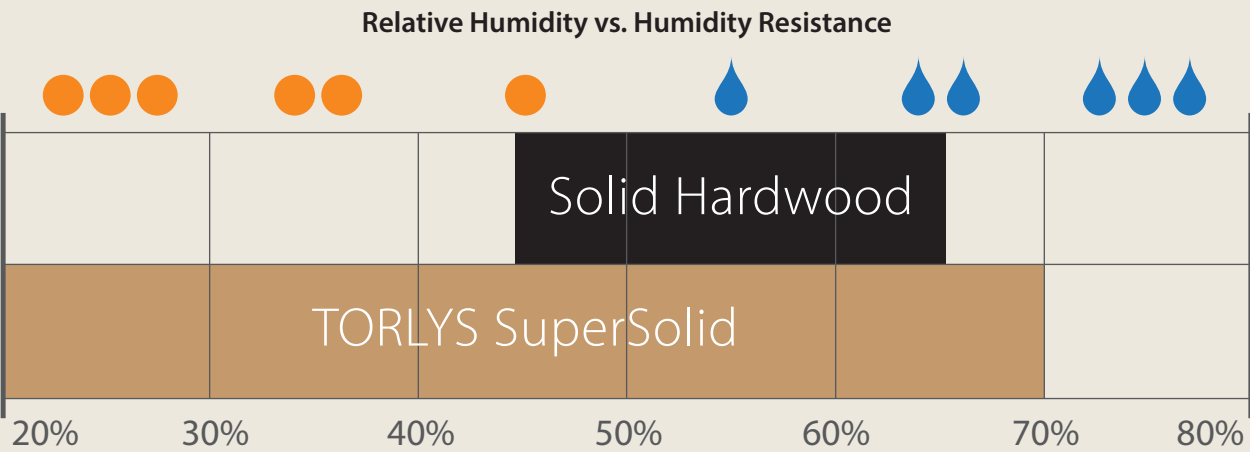

Better Floors for a Better World

4 times more flooring from a single tree than solid hardwood.

## Traditional Solid Hardwood vs. SuperSolid Hardwood

|   |   |
|---|---|
| • Solid hardwood construction                             | • |
| • Increases the resale value of your home                 | • |
| • Enhances the appearance & style of your décor           | • |
| • Re-sandable   | • |
| Glue down and floating installation                       | • |
| Gap & cup resistant                                       | • |
| Twist, warp & crack resistant                             | • |
| Predominantly made from post-industrial recycled hardwood | • |
| Install below and above grade                             | • |
| Installs over radiant heat                                | • |

Helps prevent gapping, cupping, twisting, warping and cracking.



Cupping



Gapping

## Maintenance

- Dust mop or vacuum regularly to remove loose soil and wipe up spills quickly with cloth or sponge.
- Only use TORLYS maintenance products. Do not use wet mops, highly acidic or alkaline cleaners, non-recommended commercial cleaners or polishes, or a treated mop that has been used to clean other floors or furniture.
- Use floor-protector pads on furniture feet. Protect your floor from hard castors on moveable furniture.
- Use caution when wearing high heels as they can dent hardwood. Keep your pet’s nails trimmed.
- Use entry-way (non-skid cotton) mats to capture tracked-in-dirt and soil, and clean them regularly. Rubber or fiber-backed mats may stain or scratch floor finish.

## Maintain Humidity in Your Home

SuperSolid Hardwood floors have the best warranty in the business, from 20-70% RH. As a general rule for comfortable living, it is recommended to maintain the RH in your home between 40 and 60%.

## TORLYS Natural Glow® Eco-Friendly Cleaning Kit

TORLYS eco-friendly cleaning products are biodegradable (with no VOCs) and fragrance free. Clean your floor as required with this easy-to-use kit. All products are available at your local TORLYS dealer.